

Building a Residential Accessory Structure: Information Guide for

Building Permit Applications

These are general guidelines only and more information may be required on a case by case basis

An **accessory structure** is a building that is secondary and incidental to the principal building on the property, attached or detached from the main building. **Accessory structures** must be on the same property as the building or use to which they are accessory, and not used for human habitation. Accessory structures are buildings such as garages, sheds, playhouses, storage buildings, garden structures, greenhouses, boat houses, pool houses, cabanas, and other similar residential buildings.

When is a building permit required for an accessory structure?

- When the accessory structure (new or replacement) is 108 ft² in size or greater
- If the accessory structure is attached to another building
- When there is plumbing installed in a structure, regardless of the square footage

Required Documents for Building Permit Application

- Fully completed application form, including required schedules
- Comprehensive site plan
- 1 complete set of construction drawings
- Owner Authorization form, if applicant is not the property owner

*** All forms, permit documents and construction drawings, to be submitted electronically in PDF Format Only

Site Plan Requirements

A comprehensive site plan or copy of the property survey showing:

- a. Dimensions of property
- b. Proposed location of new construction, including all existing structures
- c. Location of well and septic system, if applicable
- d. Distance from proposed structure to existing buildings, property lines, septic system, well
- e. Hydro Lines show location, height and or depth of both overhead and underground lines

Construction Drawings showing:

a. Plan views

- i. Footing and foundation
- ii. Floor, wall, and roof construction
- iii. Window/door sizes (lintel sizing)
- iv. Connection to existing structure (only if attached)

b. Elevation views (front and side)

- i. Height of structure
- ii. Exterior materials
- c. Sections
 - i. Cross Section
 - ii. Wall sections (as needed)

See attached sample drawings for further details

Timeline for Applications

Once a **complete** building permit application is submitted, the permit will be reviewed within 10 business days

Where to apply for a building permit?

Please submit your complete application and permit documents on our e-Permitting software,

Cloudpermit 🗩

For more information please visit:

https://www.get.on.ca/living-here/building-permits-and-inspections

Cost of building permit

Please see Schedule "A" of By-Law 13/2018 for applicable building permit fees. These fees cover all plans review, building permit, and resulting inspections. Note: All fees and charges listed herein are payable upon collection of the Building Permit.

Questions?

Contact the Building Department for assistance at <u>building@get.on.ca</u> (Note: Once a Building Permit application has been submitted into Cloudpermit, question can be asked directly to The Building Department through the 'workspace' within Cloudpermit.)


Zoning


All structures must meet the requirements for the zone in which it is located. If you are unsure of the zoning on your property, please call the Planning Department 519.856.9596 X 112


Grand River Conservation Authority


Is your property under the GRCA's regulated area? Property owners are encouraged to check their property at <u>www.grandriver.ca</u> before applying for a building permit; additional permission from the GRCA may be required for you proposed construction.


Township of Guelph Eramosa 8348 Wellington Road 124 • Box 700 • Rockwood, ON • N0B 2K0 Phone: (519) 856-9596 • Fax: (519) 856-2240

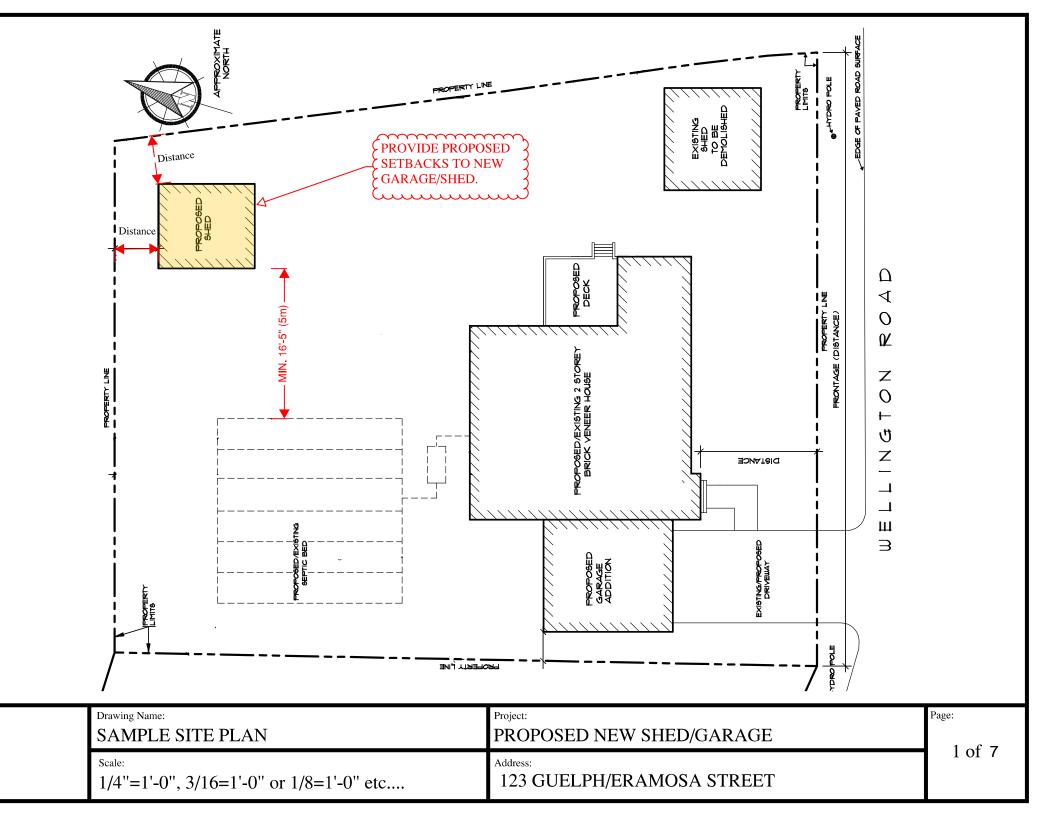

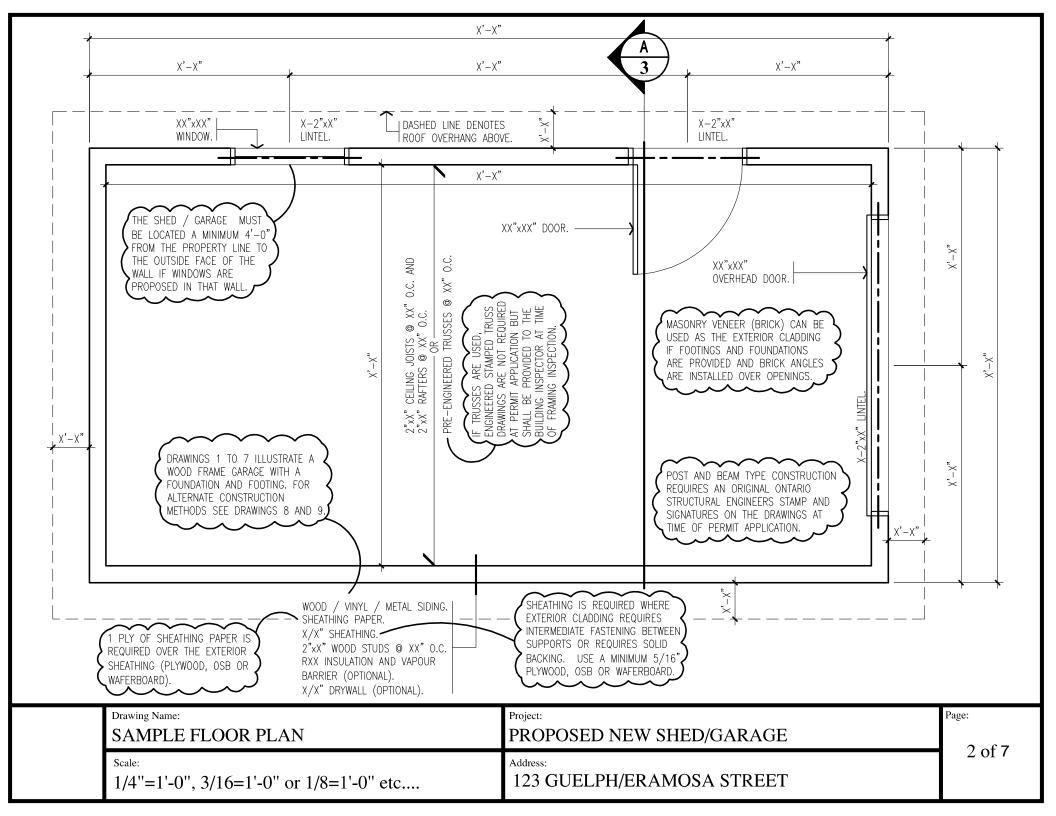

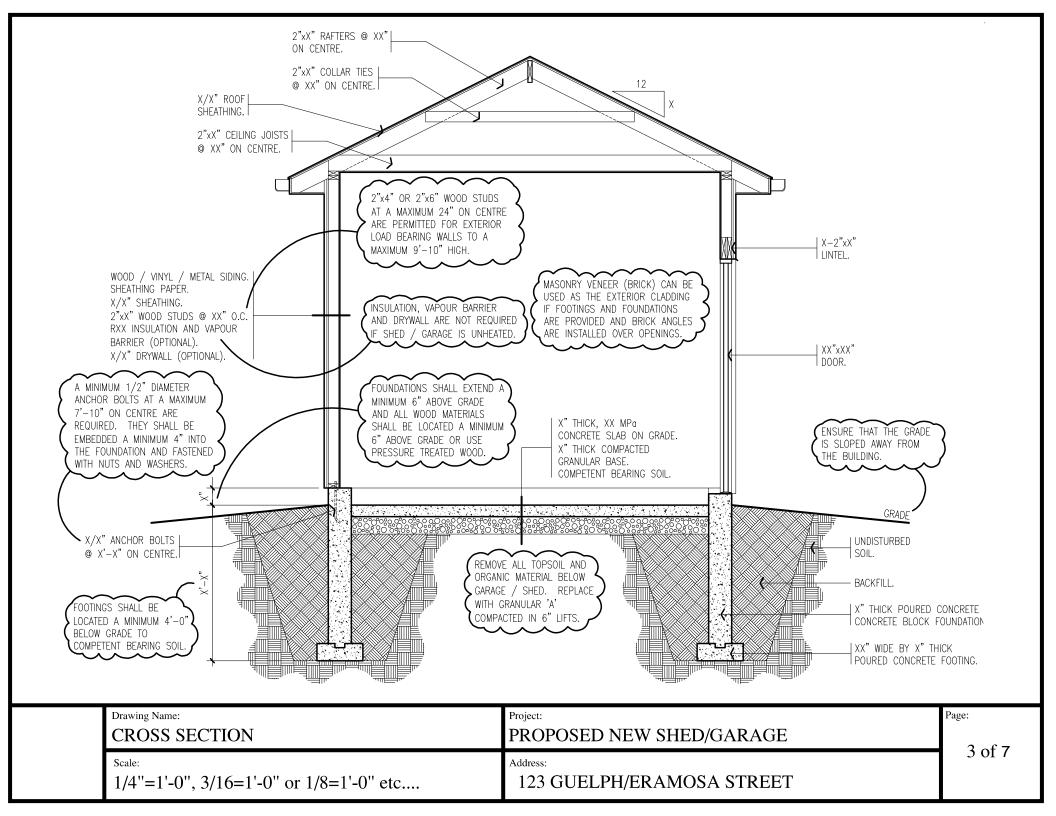

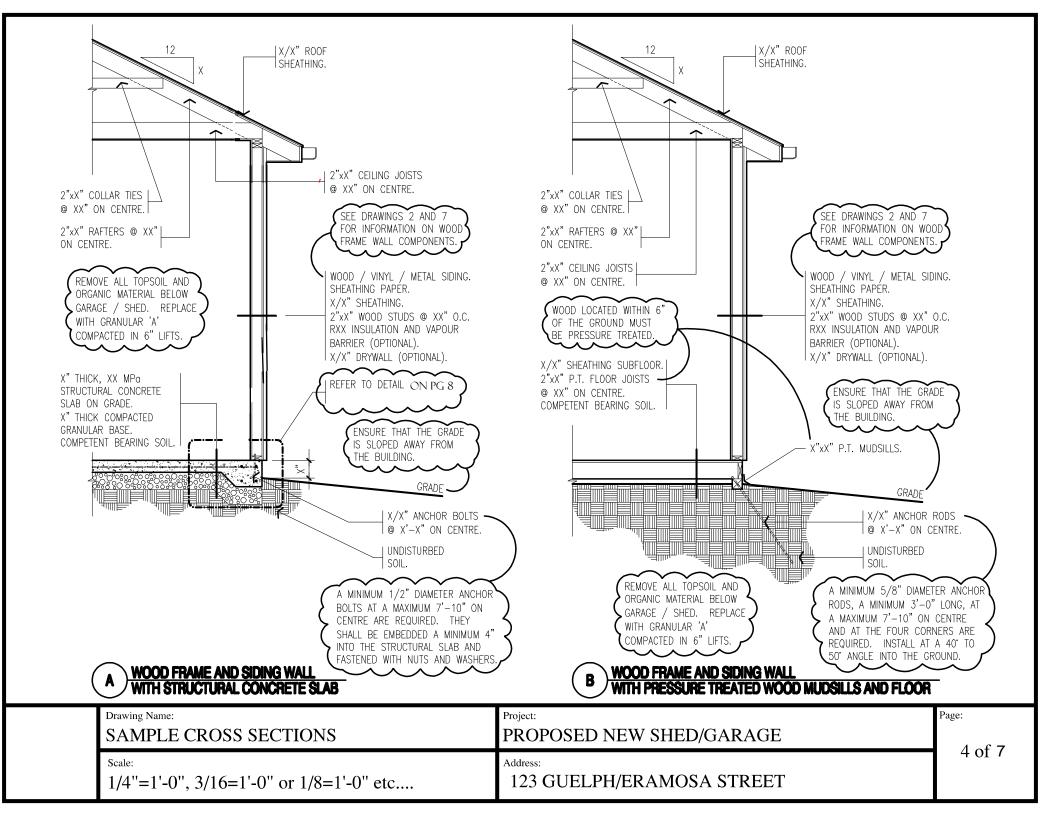

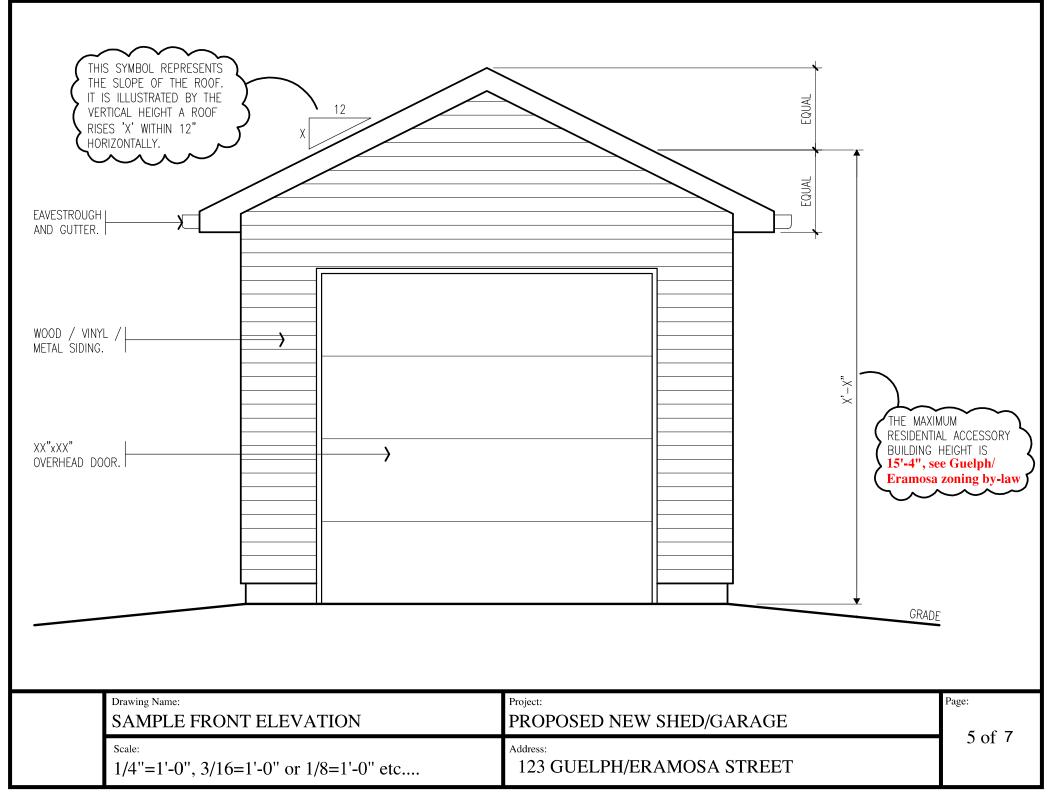

	ASPHALT SHINGLES (OR OTHER APPROVED ROOFING MATERIAL).		
WOOD / VINYL / - METAL SIDING. / - XX"xXX" WINDOW IN DOOR.			XX"xXX" WINDOW.
			GRADE
S	Brawing Name: SAMPLE SIDE ELEVATION Scale: 1/4"=1'-0", 3/16=1'-0" or 1/8=1'-0" etc	Project: PROPOSED NEW SHED/GARAGE Address: 123 GUELPH/ERAMOSA STREET	Page: 6 of 7

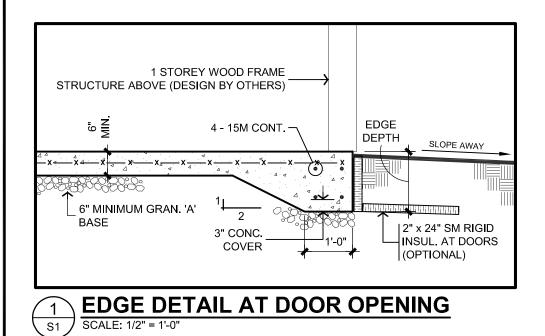


TABLE 1

LARGEST DIMENSION	EDGE DEPTH
MAX. 20'-0"	13"
MAX. 24'-0"	14"
MAX. 28'-0"	15"
MAX. 32'-0"	16"
MAX. 36'-0"	17"
MAX. 40'-0"	18"

NOTE

FOR FOUNDATIONS WITH GREATER THAN 40'-0" DIMENSIONS, FOUNDATION DESIGN MUST BE COMPLETED BY A PROFESSIONAL ENGINEER

GENERAL NOTES:

- THIS DESIGN HAS BEEN COMPLETED TO THE 2024 ONTARIO BUILDING CODE (r2024). CONTACT TACOMA ENGINEERS FOR CONSTRUCTION REVIEWS AS REQUIRED BY 2
- THE LOCAL MUNICIPALITY. THIS FOUNDATION DESIGN SHALL NOT BE USED IN GEOGRAPHIC AREAS SUBJECT TO 3. TERMITE INFESTATION.

SITE & SOILS:

- 1. PREPARE THE AREA FOR PROPOSED STRUCTURE BY REMOVING ALL TOPSOIL AND ORGANIC MATERIAL FROM THE AREA OF THE BUILDING.
- SLOPE FINAL GRADE AWAY FROM THE BUILDING. 2.
- 3. BEAR SLAB ON GRANULAR FILL (6" MINIMUM) OR 3/4" CRUSHED STONE TO 98% STANDARD PROCTOR DENSITY ON SOUND ORIGINAL (NATIVE) SUBGRADE.
- 4. SUBGRADE SHALL BE SUITABLE FOR 75 kPa (1500 psf) SAFE BEARING.

CONCRETE:

- CONCRETE WORK SHALL CONFORM TO CAN/CSA-A23,1,2,3 FOR MATERIALS AND WORKMANSHIP. CLASS OF CONCRETE STRENGTH W/C RATIO AIR ENTRAINMENT 32 MPa C2 0.45 5 - 8%
- 2. ALL CONCRETE SHALL BE KEPT MOIST DURING THE FIRST THREE DAYS OF CURING. DO NOT ADD WATER TO CONCRETE ON SITE.
- ALL REBAR SHALL BE DEFORMED BARS WITH A MINIMUM YIELD STRENGTH OF 400 MPa. 3. ALL LAP LENGTHS AS FOLLOWS:
 - 10M BARS 450mm (18") A:
 - B: 15M BARS 600mm (24")
- 4. PROVIDE A MINIMUM 9" LAP FOR WELDED WIRE MESH.
- PROVIDE CONTINUOUS REINFORCING AROUND CORNERS WITH 15Mx24"x24" BENT 5. DOWELS (FOUR DOWELS PER CORNER).
- DO NOT SAWCUT SLAB. 6.
- 7. 2 10M BARS CAN BE SUBSTITUTED FOR 1 15M BAR.

INSULATION:

1. ALL INSULATION SHALL BE EXTRUDED POLYSTYRENE FOAM (XPS) TYPE IV, V, VI OR VII WITH A MINIMUM NOMINAL R-VALUE OF R5 / INCH.

DIRECTIONS FOR USE:

- THIS FLOATING SLAB FOUNDATION DESIGN IS FOR A 1 STOREY WOOD STUD FRAMED STRUCTURE WITH NO MASONRY OR OTHER CRACK SUSCEPTIBLE FINISHES.
- DETERMINE THE LARGER BUILDING DIMENSION, LENGTH OR WIDTH AND SELECT EDGE DEPTH FROM TABLE 1. NOTE: SLAB DESIGN IS NOT AFFECTED BY SPAN DIRECTION OF ROOF FRAMING ABOVE.
- TO INCLUDE ATTIC TRUSSES ADD THE WIDTH OF THE ROOM TO BOTH THE LENGTH AND WIDTH. 3. TO ADD UP TO 48" OF MASONRY VENEER AROUND THE PERIMETER, INCREASE EDGE DEPTH BY 2", INSTALL VERTICAL Δ CONTROL JOINTS IN VENEER AT MAX. 8'-0" O.C.
- BUILDINGS THAT DO NOT MEET THE ABOVE CRITERIA SHALL NOT USE THIS DETAIL. 5.

EXAMPLE 1:

18'-0" x 36'-0" WITH 4'-0" BRICK VENEER.

INSTALL SLAB WITH A 19" EDGE DEPTH

FROM TABLE 1, FOR 36'-0" ---> SELECT 17" EDGE DEPTH FOR BRICK VENEER ADD 2" TO EDGE THICKNESS

- IS NOT PERMITTED.

